

## **EXHIBIT G**

### **California State Lands Commission Presurvey Notice Requirements for Permittees to Conduct Geophysical Survey Activities**

All parts of the Presurvey Notice must be adequately filled out and submitted to the CSLC staff a minimum of twenty-one (21) calendar days prior to the proposed survey date to ensure adequate review and approval time for CSLC staff. Note that one or more of the items may require the Permittee to plan well in advance in order to obtain the necessary documentation prior to the Notice due date (e.g., permits from other State or Federal entities). Please use the boxes below to verify that all the required documents are included in the Presurvey Notice. If "No" is checked for any item, please provide an explanation in the space provided. If additional space is needed, please attach separate pages.

Please use the boxes below to verify that all the required documents are included in the Presurvey Notice. If "No" is checked for any item, please provide an explanation in the space provided. If additional space is needed, please attach separate pages.

<b>Yes</b>	<b>No</b>	
X	<input type="checkbox"/>	Geophysical Survey Permit Exhibit F
X	<input type="checkbox"/>	Survey Location (including a full-sized navigation chart and GPS coordinates for each proposed track line and turning point) Explanation: _____
	X	Permit(s) or Authorization from other Federal or State agencies (if applicable) Explanation: _____
X	<input type="checkbox"/>	21-Day Written Notice of Survey Operations to Statewide Geophysical Coordinator/
X	<input type="checkbox"/>	U.S. Coast Guard Local Notice to Mariners/
X	<input type="checkbox"/>	Harbormaster and Dive Shop Notifications Explanation: _____
X	<input type="checkbox"/>	Marine Wildlife Contingency Plan Explanation: _____
X	<input type="checkbox"/>	Oil Spill Contingency Plan Explanation: _____
X	<input type="checkbox"/>	Verification of California Air Resources Board's Tier 2-Certified Engine Requirement Explanation: _____
X	<input type="checkbox"/>	Verification of Equipment Service and/or Maintenance (must verify sound output) Explanation: _____
<input type="checkbox"/>	X	Permit(s) or Authorization from California Department of Fish and Wildlife for surveys in or affecting Marine Protected Area(s) (if applicable). Explanation: <i>Survey area is not within nearby Channel Islands MPA</i>

---

NOTE: CSLC staff will also require verification that current biological information was obtained and transmitted as outlined in Section 5 of this permit

## EXHIBIT F

### PRESURVEY NOTIFICATION FORM

Applicant/Permittee's Mailing Address:  
Tim Elfers  
USGS Pacific Coastal and Marine Geology  
2885 Mission Street  
Santa Cruz, CA 95060

Date: 1/31/2018  
Jurisdiction: Federal    State X  
If State: Permit #PRC 8394  
Region: II  
Area: Santa Barbara, CA

### GEOPHYSICAL SURVEY PERMIT

Check one:   X   New survey            Time extension of a previous survey

U.S.G.S. Pacific Coastal and Marine Geology (Applicant/Permittee) will conduct a geophysical survey offshore California in the survey area outlined on the accompanying navigation chart segment. If you foresee potential interference with commercial fishing or other activities, please contact the person(s) listed below:

#### FEDERAL WATERS (outside 3 nautical miles)

- 1) Applicant's representative: Tim Elfers
- 2) Federal representative: Joan Barminski (BOEM)

NOTE: Any comments regarding potential conflicts in Federal waters must be received by the Applicant's Representative and lead Federal agency within ten (10) days of the receipt of this notice.

#### STATE WATERS (Inside 3 nautical miles)

- 1) Permittee's representative: Tim Elfers
- 2) CSLC representative: Richard Greenwood

NOTE: Any comments regarding potential conflicts in State waters should be received as soon as possible by the Permittee's representative, no more than fifteen (15) days after the receipt of this notice.

1. Expected Date(s) of Operation: Feb. 26 – Mar. 2, 2018
2. Number of Survey Days: 3-4 days
3. Hours of Operation: 6:30AM to 5:30PM
4. Survey Purpose/Objective: Bathymetric survey of recent landslide
5. Vessel Name: R/V Parke Snaveley
6. Vessel Official Number: USGS-2001279
7. Vessel Radio Call Sign: WZ3374
6. Vessel Captain's Name: Daniel Powers
7. Vessel will monitor Radio Channel(s): 13,16
8. Vessel Navigation System: Differential GPS
9. Equipment to be used: SWATH-Plus Interferometric Echo Sounder
  - a. Frequency (Hz, kHz): 234 kHz
  - b. Source level: (dB re 1  $\mu$ Pa at 1 meter (m) (rms): 200 dB RMS

- c. Number of beams, across track beam width, and along track beam width:  
1 beam, Phase Differencing Bathymetric Sonar; 360m swath width; 2m along track beam width.
- d. Pulse rate and length: 4.5-13.5 pps at 34-500  $\mu$  seconds depending on water depth.
- e. Rise time: 7  $\mu$  seconds
- f. Estimated distances to the 190 dB, 180 dB, and 160 dB re 1 uPa (rms) isopleths,  
190 dB: 1M; 180 dB: 8M; 160 dB: 50M  
These estimates are based on the underwater sound propagation equation:  
$$RSPL = SL - 20 \log(R/R_o) - AR,$$
 where  
RSPL=received sound potential level  
SL= RMS source level re. 1 uPa (rms) based on manufacturer's specifications  
R= Distance  
Ro= Reference Distance (1 m)  
A= sound absorption coefficient
- g. Deployment depth: 2 m
- h. Tow speed: 8 knots
- i. Approximate length of cable tow: 0 m.

Applicant's Representative:  
Tim Elfers  
US Geological Survey  
2885 Mission Street  
Santa Cruz, CA 95060  
(831) 460-7479

California State Lands Representative:  
Richard B. Greenwood  
Statewide Geophysical Coordinator  
200 Oceangate, 12th Floor  
Long Beach, CA 90802-4331  
(562) 590-5201

BOEM Representative:  
Joan Barminski  
Chief, Office of Reservoir & Production  
770 Paseo Camarillo  
Camarillo, CA 93010  
(805) 389-7707

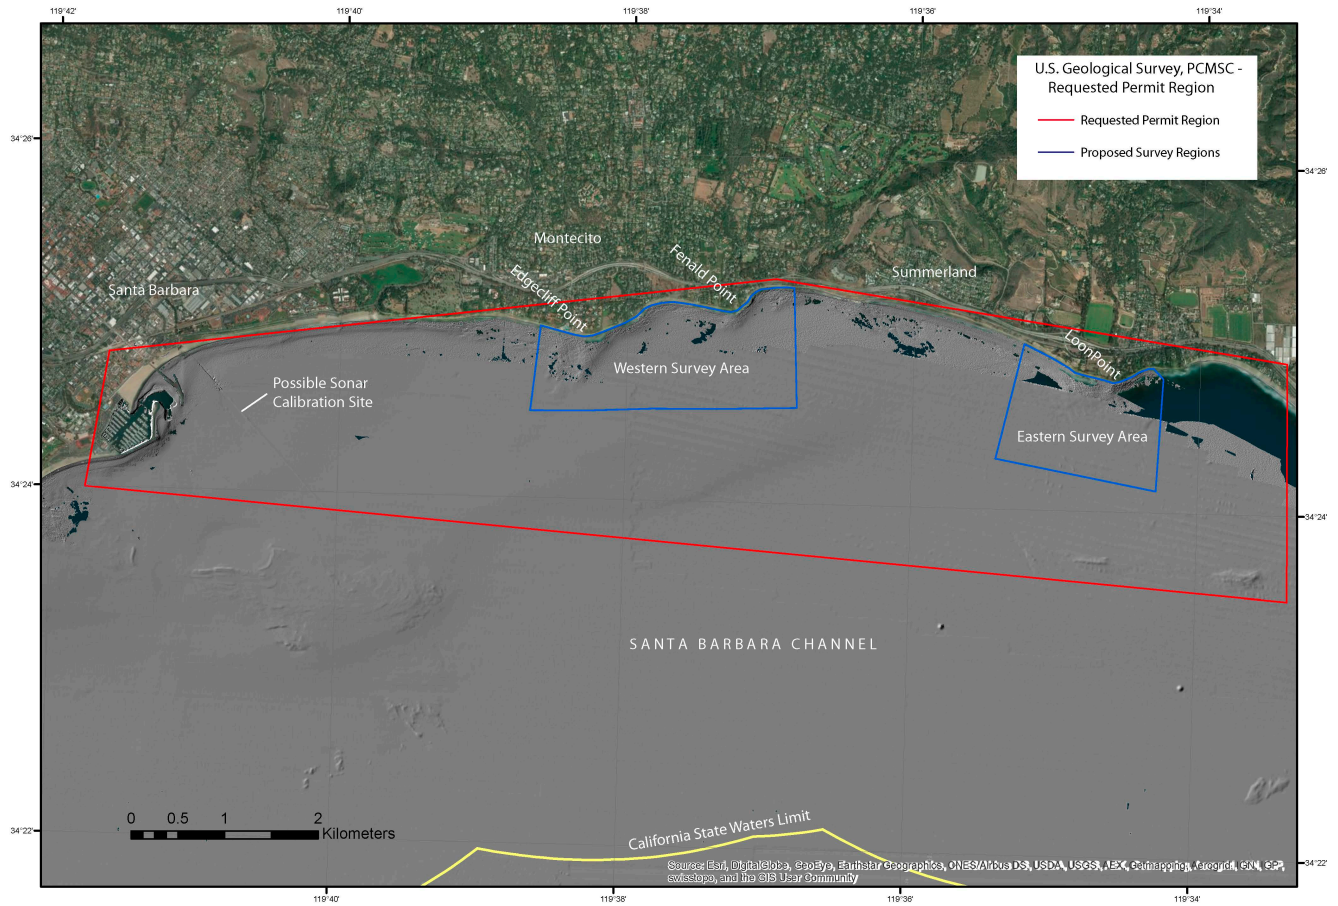


Table 1. Bounding coordinates for Santa Barbara Survey

Direction	Bounding Coordinate
North	34.41464°
South	34.39166°
East	-119.5583°
West	-119.69612°



Table 2. Start and end point for Santa Barbara Western Survey Area

Line No.	Start		End	
	Lat (°N)	Long (°E)	Lat (°N)	Long (°E)
W-01	34.40843113	-119.6443868	34.40918273	-119.6135149
W-02	34.40888167	-119.6444028	34.40963327	-119.613531
W-03	34.40933221	-119.6444189	34.41008381	-119.613547
W-04	34.40978275	-119.6444349	34.41053435	-119.6135631
W-05	34.41023329	-119.644451	34.41098489	-119.6135791
W-06	34.41068383	-119.644467	34.41143543	-119.6135952
W-07	34.41113437	-119.6444831	34.41188597	-119.6136112
W-08	34.41158491	-119.6444991	34.4123365	-119.6136273
W-09	34.41203544	-119.6445152	34.41278704	-119.6136433
W-10	34.41248598	-119.6445312	34.41323758	-119.6136594
W-11	34.41293652	-119.6445473	34.41368812	-119.6136754
W-12	34.41320685	-119.6445569	34.41395844	-119.6136851
W-13	34.41347717	-119.6445665	34.41422877	-119.6136947
W-14	34.41374749	-119.6445762	34.41449909	-119.6137043
W-15	34.41401782	-119.6445858	34.41476941	-119.613714
W-16	34.41428814	-119.6445954	34.41503974	-119.6137236
W-17	34.41455846	-119.644605	34.41531006	-119.6137332
W-18	34.41482879	-119.6446147	34.41558038	-119.6137429
W-19	34.41509911	-119.6446243	34.41585071	-119.6137525
W-20	34.41553296	-119.63714	34.41610501	-119.6137727
W-21	34.41582525	-119.6365989	34.41638544	-119.6137815
W-22	34.41610822	-119.6356766	34.41664835	-119.6137897
W-23	34.41642532	-119.6347977	34.41692878	-119.6137984
W-24	34.41671147	-119.6337274	34.41719169	-119.6138066
W-25	34.4169894	-119.6330377	34.41747212	-119.6138153
W-26	34.41728168	-119.6324966	34.41773502	-119.6138235
W-27	34.41756143	-119.6317224	34.41799793	-119.6138317
W-28	34.4178694	-119.6312664	34.41827836	-119.6138404
W-29	34.41839243	-119.6199814	34.41854127	-119.6138486
W-30	34.41869809	-119.6196312	34.41882125	-119.6138785
W-31	34.41894981	-119.6193427	34.41908415	-119.6138867
W-32	34.41922014	-119.6193524	34.41935447	-119.6138964
W-33	34.41946671	-119.6189568	34.41960951	-119.6139242
W-34	34.41973324	-119.6187958	34.41985444	-119.613953
W-35	34.42000067	-119.6185925	34.4201187	-119.6138977
W-36	34.42032839	-119.6180313	34.42043328	-119.6139498
W-37	34.41541482	-119.6446359	34.41553006	-119.6393041
W-38	34.41567113	-119.6446277	34.41576719	-119.6408081
W-39	34.41593986	-119.6446687	34.41600629	-119.6415964
W-40	34.41621035	-119.6446284	34.41625394	-119.6426127

Table 3. Start and end point for Santa Barbara Eastern Survey Area

Line No.	Start		End	
	Lat (°N)	Long (°E)	Lat (°N)	Long (°E)
E-01	34.40493551	-119.5902139	34.40214472	-119.571516
E-02	34.40546784	-119.5900983	34.40267705	-119.5714004
E-03	34.40600017	-119.5899827	34.40320938	-119.5712848
E-04	34.4066444	-119.5901019	34.40385303	-119.5714311
E-05	34.40708457	-119.5897311	34.40435386	-119.5714189
E-06	34.40761046	-119.5896101	34.40487744	-119.5714075
E-07	34.40813578	-119.5895165	34.40540332	-119.5712864
E-08	34.40866167	-119.5893954	34.40597179	-119.5713038
E-09	34.40918756	-119.5892744	34.40651811	-119.571293
E-10	34.40971346	-119.5891533	34.40706557	-119.5712274
E-11	34.40997971	-119.5890961	34.40733182	-119.5711702
E-12	34.41024596	-119.5890389	34.40759807	-119.571113
E-13	34.41051221	-119.5889816	34.40786432	-119.5710558
E-14	34.41077846	-119.5889244	34.40813057	-119.5709985
E-15	34.41104471	-119.5888672	34.40839682	-119.5709413
E-16	34.41129114	-119.5887901	34.40868177	-119.5711946
E-17	34.41156517	-119.5887437	34.40895464	-119.5712029
E-18	34.41183977	-119.5886698	34.40927529	-119.5711029
E-19	34.41209106	-119.5886226	34.40950268	-119.5711099
E-20	34.41225894	-119.588216	34.40975223	-119.571145
E-21	34.41255745	-119.5880879	34.41002568	-119.5711259
E-22	34.41280758	-119.5880956	34.41025595	-119.5709957
E-23	34.41308102	-119.5880766	34.41057372	-119.5710329
E-24	34.41337779	-119.5880308	34.41084659	-119.5710412
E-25	34.4136075	-119.5879281	34.41111946	-119.5710496
E-26	34.4138821	-119.5878542	34.41137132	-119.5709749
E-27	34.41415305	-119.5877475	34.41330925	-119.5820764
E-28	34.41438293	-119.5876488	34.41361462	-119.5825509
E-29	34.41464828	-119.5875302	34.41402015	-119.5832611
E-30	34.41491184	-119.587496	34.41434616	-119.5835883
E-31	34.41521256	-119.5873461	34.41483509	-119.5847537
E-32	34.41321903	-119.5739966	34.41278171	-119.5709906
E-33	34.41341538	-119.5733163	34.4131176	-119.571248
E-34	34.41303146	-119.5744776	34.41250767	-119.5710576
E-35	34.41279447	-119.5749144	34.41217763	-119.5709207
E-36	34.41257632	-119.5752882	34.41191363	-119.570976
E-37	34.41240937	-119.5757271	34.41166714	-119.5710319

## **CALIFORNIA AIR RESOURCES BOARD TIER 2 ENGINE CERTIFICATION**

### **MM-AIR-1: Engine Tuning, Engine Certification, and Fuels**

The following information is provided as required for compliance with Mitigation Measure (MM) AIR-1: *Engine Tuning, Engine Certification, and Engine Fuels*. The USGS Research Vessel Parke Snavelly is a 36 ft., 2007 catamaran work boat. The vessel was built for USGS by Armstrong Marine in Port Angeles, WA and was delivered with two Volvo Penta D6-310 HP diesel engines. These engines comply with IMO NOx limits and the comprehensive emission requirements (EU RCD and US EPA Tier 2, rating 5 Marine Leisure and rating 4 Marine Commercial).

Regarding the NOx emissions, MM AIR-1 states that daily NOx emissions should not exceed 100 pounds based on engine certification emission factors. This can be accomplished with Tier 2 engines if daily fuel use is 585 gallons or less. This vessel only holds 150 gallons and has an efficiency of about 2 miles per gallon. Thus, on our survey, we expect to cover approximately 10-15 miles total, for an estimated maximum fuel consumption of 30 gallons.

The manufacturer's specifications for these engines is provided below.


## Life- and Rescue Boat Propulsion Engines

# D4/D6 SOLAS

132–272 kW (180–370 hp) crankshaft power acc. to ISO 8665

## New powerful D4/D6 SOLAS range

Volvo Penta has now introduced a new powerful SOLAS approved range for use in fast rescue boats, lifeboats and tender boats: the D4-180, D4-225, D4-260, D6-280, D6-310, D6-330, and D6-370 common rail marine diesel engines with rating 4 and 5 power settings. The engines are SOLAS approved for both inboard, waterjet and sterndrive propulsion.

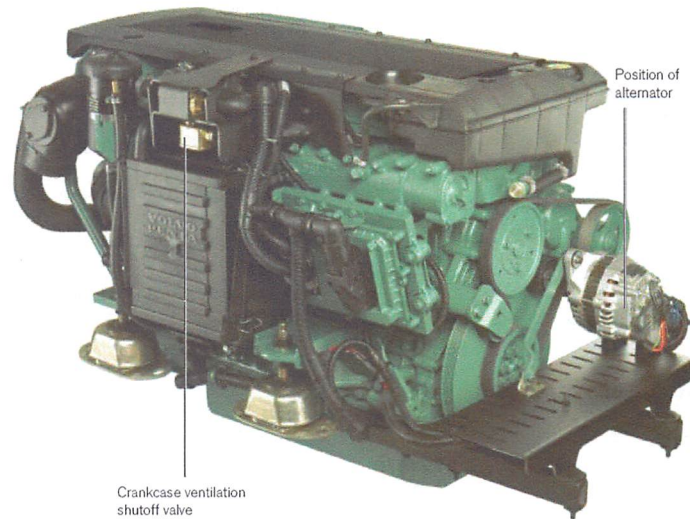

### Designed to withstand the tough Life- and Rescue boat environment

The D4/D6 Life- and Rescue boat engines are designed to comply with the requirements in the following regulations and standards:

- Council Directive 96/98/EC, as amended by Commission Directive 2002/75/EC
- SOLAS 74 Convention, as amended, Reg. III/4 and Reg. III/34
- LSA Code
- IMO Resolution MSC. 48(66)
- IMO Res. MSC. 81(70), Part 1, paras. 6.10.2 to 6.10.6 and 6.14.6 to 6.14.8.
- U.S.C.G.

### SOLAS specifications

The SOLAS regulations specify the following demands for the engine:

- Withstand free fall of the lifeboat from 3 meters
- Withstand a lateral impact of 3.5 m/s of the lifeboat
- Stop automatically on capsizing and easily restart
- Fuel and lubricating systems shall prevent the loss of fuel and oil during capsizing
- Work submerged in water to the crankshaft centerline
- Work for not less than 5 min. after starting cold with the lifeboat out of the water

- Run properly at an angle of up to 10° trim and an angle of up to 20° list, either way
- Manual starting system or power starting system with two independent sources
- The lifeboat engine shall be designed to limit electromagnetic emissions
- The engine to be started without heater down to –15°C (–30°C with heater)

### Standard high performance engines

All SOLAS engines are based on standard engine designs with SOLAS kits mounted and are tested in factory before delivery to boat builders. The major changes are a new position of the existing alternator and a new crankcase ventilation shutoff valve.

The design will extend the engine by approx. 270 mm in fore end to accommodate the new position of the alternator. The void space can be used to accommodate the batteries, as usual. See the drawing on page 2 for more information regarding dimensions of the SOLAS kit for D4/D6.

The SOLAS kit also includes a tilt switch, to be mounted on the engine bulkhead.

The base engine mounts are originally designed for high G-forces. Thus, there is no need for extra reinforcement for fast rescue boats and lifeboat applications to meet the SOLAS demands.

### EVC for full control in all situations

All engines are equipped with EVC-C, the latest development in engine control and instrumentation for Volvo Penta marine engines, for easy installation and easy handling.

### A propulsion package fully matched, tested and supported by one company

The engines and the drives are developed and produced by Volvo Penta, and the service of the engines will be well taken care of by more than 5,000 Volvo Penta commercial and leisure dealers around the world.

### Meeting new emission standards

The common rail injection system in combination with electronics and an advanced combustion system are setting new standards in minimizing noxious emissions and particulates. The engines comply with IMO NOx limits and the comprehensive emission requirements EU RCD and US EPA Tier 2 rating 5 Marine Leisure, rating 4 Marine Commercial).

### Certificate

The engines will be delivered with a certificate and marked with a wheelmark in accordance with the MED/SOLAS regulations.

**VOLVO  
PENTA**



# D4/D6 SOLAS

## Technical description

For full technical information and performance data for the D4 and D6 engines, please see the product bulletins and technical data sheets for the selected power setting and model of D4 and D6 engine family.

## Technical Data

Crankshaft power + dry weight BT inboard

D4-180:

@ 2800 rpm, kW (hp) ..... 132 (180)

kg (lb) ..... 482 (1063)

D4-225:

@ 3500, kW (hp) ..... 165 (225)

kg (lb) ..... 482 (1063)

D4-260:

@ 3500 rpm, kW (hp) ..... 191 (260)

kg (lb) ..... 482 (1063)

D6-280:

@ 3500 rpm, kW (hp) ..... 206 (280)

kg (lb) ..... 580 (1279)

D6-310:

@ 3500 rpm, kW (hp) ..... 228 (310)

kg (lb) ..... 580 (1279)

D6-330:

@ 3500 rpm, kW (hp) ..... 243 (330)

kg (lb) ..... 580 (1279)

D6-370:

@ 3500 rpm, kW (hp) ..... 272 (370)

kg (lb) ..... 580 (1279)

## Battery

Minimum requirements for cold start:

- 12V, 1150 CCA for D4 engines
- 12V, 2300 CCA for D6 engines

## Cold starting device

2 kW engine coolant heater to be installed for coldstarts below -15°C (down to -30°C)

## Reverse gear

- Reverse gear with matched drop center and 8° down angle for compact installation and minimum propeller shaft angle.
- Bevel gears which results in smooth running at all speeds
- Hydraulically operated clutch for smooth shifting
- Electrical shifting performed by electro-magnetic valves
- Seawater-cooled oilcooler

## Waterjet

- For selection of waterjet please contact your waterjet dealer.

## Sterndrive DPH/DPR

- Complete with transom shield, and installation components
- Max tilt angle 50° (adjustable)
- Protective zinc anodes to prevent corrosion
- Built-in kick-up function to reduce possible damage, in the event the drive strikes an underwater object
- Electrical shifting performed by electronic actuator
- Power Trim with one-button operation in twin installation
- Fully integrated water inlet and exhaust system
- Fully hydraulic power-assisted steering system
- Isolated propellers to prevent corrosion



Contact your local Volvo Penta dealer for further information.

Not all models, standard equipment and accessories are available in all countries. All specifications are subject to change without notice.


The engine illustrated may not be entirely identical to production standard engines.

## Dimensions

Dimensions shown are additional dimensions for SOLAS kit on D4 and D6. Not for installation. For more dimensions, please refer to the respective product bulletin and installation drawing.

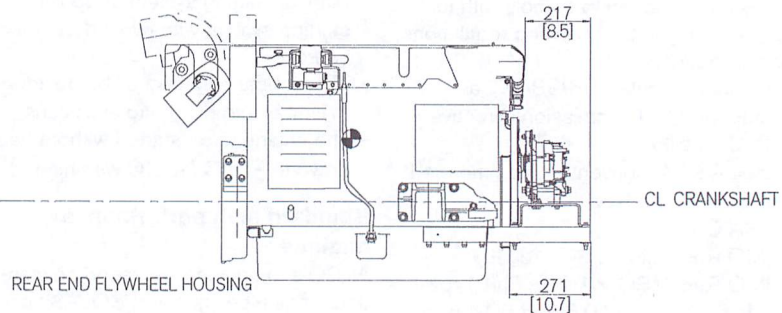

- Ⓐ CRANKCASE VENTILATION
- Ⓑ UNIVERSAL BRACKET
- Ⓒ NEW PLACEMENT FOR ALTERNATOR

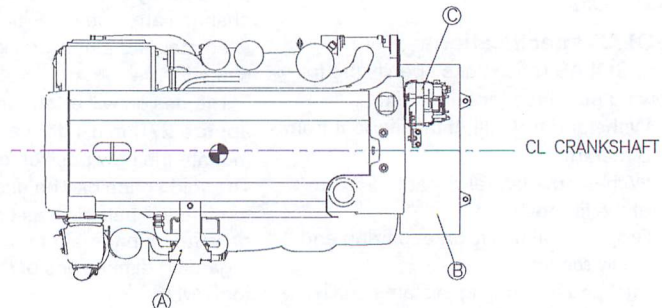

**VOLVO  
PENTA**

**AB Volvo Penta**  
SE-405 08 Göteborg, Sweden  
www.volvopenta.com

**U.S. GEOLOGICAL SURVEY  
PACIFIC COASTAL AND MARINE GEOLOGY SCIENCE CENTER  
GEOPHYSICAL SOUND SOURCE SYSTEMS MAINTENANCE RECORD**

**SWATH Plus 234.5 kHz Interferometric Mapping Echo Sounder**


**1.0 Introduction**


The USGS Pacific Coastal and Marine Science Center (PCMSC) owns and operates a broad range of geophysical sound sources, seafloor mapping systems, geologic and geotechnical sediment sampling systems, and oceanographic instrument systems. Considerable technical and operational support is required to successfully undertake and complete its field programs. Operational and technical support for these systems is provided by the PCMSC Marine Operations Facility (Marfac) in Santa Cruz, CA. The MarFac team is comprised often ocean engineers, electronics technicians, and marine engineering technicians. They operate, maintain and repair all geophysical and oceanographic systems used to support PCMSC's scientific field operations.

The SWATHplus 234 mapping sonar is owned and operated by the USGS PCMSC. This system has been thoroughly checked, tested and calibrated according to the manufacturer's (SEA Ltd.) recommended procedures. This system is comprised of the transducer interface unit {TIU) Ser# 10011 which itself houses three transducer electronics module (TEMs) Ser# 2115, 2116 and 2107; and the Three actual sonar transducers on a mount with fixed deck-leaders. The results of this evaluation confirm the SWATHplus 234 system to be operating at SEA's stated specifications in all regards.

System checkout includes physical inspection of all components, cables, connectors and electronics for any signs of corrosion, wear or damage, all necessary cleaning and full functionality checks. Complete disassembly, cleaning, and re-assembly of the TEMs is followed by precise calibration and check of all Phase Offsets. Transducer capacitance and insulation tests are performed to ensure proper operation and identify any possible signs of transmitter or receiver degradation.

These procedures were followed by a full at-sea check of all system parameters in order to confirm system performance meets spe s. The Swath Plus 234 is fully compliant with SEA stated capabilities and specifications.

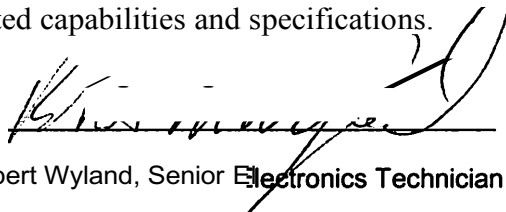  
Robert Wyland, Senior Electronics Technician

  
Date

US Geological Survey - Pacific Coastal and Marine Geology Science Center  
Verification of Equipment Service/Maintenance – Santa Barbara Survey

**SYSTEM CHECKOUT LIST**

**Date:** 312712017

**Inspecting Technician:** Robert Wyland

Operational Elements	Condition Flag	Comments
Physical condition, inside and out	OK	Good condition
Condition of connectors	OK	Good condition
Clean dust from fans	OK	Completed
Clean all connectors to ensure good contact	OK	All contacts clean
Check supply voltages	OK	Complete
Inspect cables and wires (wear on insulation, signs of damage, etc.)	OK	All cables in good repair
Remove the TEMs and take off the top of the cans	OK	Completed
Inspect the age and version, and comment on state and any issues with the hardware (e.g. known problems with later versions of TEM boards)	OK	Late st version Rev. 8.2 confirmed
Actual phase offsets after calibration recorded	OK	Phases recorded
Check cable runs, avoiding sources of wear and electrical interference.	OK	Completed
Screw-lock to hold nuts, screws, etc. in place	OK	Completed
Check transducers and cables for signs of wear and damage and possible water ingress	OK	Transducers dry and clean, no excessive wear
	OK	
Biological growth on transducer faces	OK	Transducer faces clean
Check connectors for signs of wear, damage and corrosion. Clean the pins if necessary.	OK	Completed
Check electrical connections using capacitance and "Megger" insulation tests from the transducer connectors	OK	Completed
Replace any sacrificial anodes, connector and housing seals, etc.	OK	Completed

Phase Offset Measurements

TEMS		Phase Offsets						Firmware
Side	Serial Number	Element	* Degrees	Element	* Degrees	Element	* Degrees	Ver.
Port	2115	AB	-1.41	AC	0	AD	-1.41	Rev. 8.2
Stbd	2107	AB	-1.41	AC	2.81	AD	0	Rev. 8.2
Forwd	2116	AB	0	AC	0	AD	0	Rev. 8.2

\*Nominal phase offset values are balanced across port and starboard; acceptable values are within 5 degrees.

**Marine Wildlife Mitigation Plan  
Santa Barbara Survey  
Santa Barbara, CA.**

**(February 26 – March 2, 2018)**

**1.0 INTRODUCTION**

This marine wildlife mitigation plan is prepared in compliance with the USGS Pacific Coastal and Marine Science Center's existing State Geophysical Permit PRC 8394. This plan is intended to provide guidance to USGS vessel operators and scientific field personnel collecting geophysical data for the Pacific Coastal and Marine Science Center (PCMSC) in Santa Cruz, CA to avoid significant impacts to marine wildlife that may occur during regular geophysical surveys.

**1.1 Regulatory Basis**

Species that are either currently in danger or soon likely to be in danger of extinction throughout all or a portion of its range are protected by the Endangered Species Act of 1973. The United States Fish and Wildlife Service (USFWS), and the National Oceanic and Atmospheric Administration (NOAA) National Marine Fisheries Service (NMFS) implement the Endangered Species Act. During the consultation with NMFS to issue a permit for the offshore geophysical survey, it was determined no incidental take permits are required to use the equipment identified in this document to conduct scientific data acquisition in federal waters offshore of the California coast.

**1.2 Geophysical Survey Purpose and Objectives**

The U.S. Geological Survey, Pacific Coastal and Marine Science Center will conduct a survey along the Santa Barbara coast to characterize the impacts of the January 2018 debris flows from the Santa Ynez Mountains on the seafloor offshore of these watersheds. The survey involves swath-mapping surveys (bathymetry and acoustic backscatter) in order to document changes to the seafloor caused by slide debris near creek mouths that experienced the debris flows and compare these measurements with pre-event records. Seafloor mapping surveys have been collected along the California coast over the last several years as part of the California State Waters Mapping Program. The primary objective of the cruise, therefore, is to obtain high-resolution and accurate maps of the seafloor bathymetry and acoustic properties in regions likely impacted by the January 2018 debris flows.

PCMSC will contact local whale-watching operations to acquire information on the current composition and relative abundance of marine wildlife offshore as well as any pinniped haul out sites. Whale activity is expected to be moderate to high. Additionally, one day prior to survey activities local whale watching operations will be contacted to get an update on marine wildlife sightings in the area. This information will be conveyed to the captain and crew prior to the survey.

A review of environmental responsibility of project operations will be conducted by the




chief scientist in charge of the survey operations prior to commencing the first day of operations. When new personnel will be in the crew, this training will be repeated at least for those new to the crew. They will be made aware of their individual responsibility and will be shown how to be aware of possible environmental impacts and how to mitigate them during the geophysical survey operations. Information relating to seasonality, as an indication of the types of animals that might be in our survey area, at the time of survey work will also be presented to the crew. A copy of this document will be provided to the crew of our survey vessel.

All personnel will be expected to be consistently aware that they are to be alert to any presence of marine wildlife while they are performing their duties. There are a number of signs/indications of marine wildlife presence and each crew member will be responsible to maintain vigilance for those signs within the constraints of their project duties. Some of those indications are:

- a. Sounds - such as splashing, vocalizations (by animals and birds), and blowing (breathing).
- b. Visual indications - birds aggregating, changes in water character such as areas of rippled water, white water caused by splashing, changes in color or shape of the ocean surface,

### **1.3 Survey Schedule and Layout**

The survey is scheduled to commence field activities on Feb. 26, 2018 and is expected to take no more than 5 days. The survey will be conducted aboard the R/V Parke Snively out of Santa Barbara and will cover an area of approximately 4.8 square kilometers off of Santa Barbara, CA

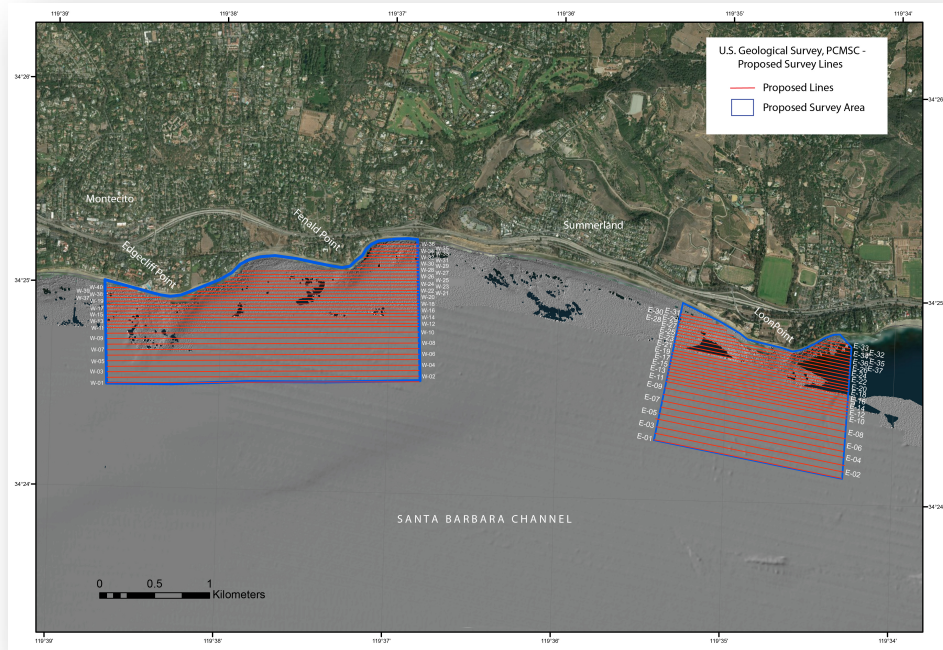

**Figure 1. Regional Map of Survey Area**

## 2.0 Survey Equipment and Activities

The survey vessel will be the R/V Parke Snavely, a 36 foot long, aluminum-hulled catamaran owned and operated by USGS PCMSC. Only daylight data collection will be conducted with the vessel returning to Santa Barbara daily.

PCMG proposes to use the following equipment to collect the required data:

- SEA Swath Plus Phase Differencing Bathymetric Sonar Echo Sounder

The proposed survey will require the use of a marine vessel and in-water equipment that generate noise during data acquisition. The results of modeling of the noise generated by the survey equipment is shown in Table 1. Those results indicate that the area within which the 160 dB re: 1 $\mu$ Pa rms sound level (the level specified by NOAA as potentially harmful to sensitive marine mammals) can be observed by monitors onboard the survey vessel.

**Table 1. Distances to Received Pressure Levels from Equipment Sound Source**

Sounder System	Frequency (kHz)	Source Level (dB peak)	Source Level (dB rms)	Distance to SL 160 dBrms (meters)	Distance to SL 180 dB (rms) (meters)	Distance to SL 190 dB (rms) (meters)
SEA Swath Plus Echo Sounder	234.5 kHz	216	200	50	9	3

These estimates are based on the underwater sound propagation equation:

$$RSPL = SL - 20 \log(R/R_o) - AR$$

where,  
 RSPL=Received sound potential level  
 SL= RMS source level re. 1 uPa (rms) based on manufacturer's specifications  
 R= Distance  
 Ro= Reference Distance (1 m)  
 A= sound absorption coefficient

The greatest distance from the sound source to the 160 dB level (50 m for the proposed equipment) is considered the "safety zone" for this equipment. However, because the operating frequency of 245 kHz is above the cutoff hearing threshold for marine mammals, CSLC has determined that the observance of the "safety zones" is not a requirement for this survey (personal communication, K. Keen, CSLC).

### **3.0 Marine Wildlife**

#### **3.1 Marine Wildlife**

The following discusses the marine wildlife that have been recorded within the project region, those taxa that are most likely to be within the project region during the geophysical survey, and methods that will be instituted by the vessel operator to reduce or eliminate potential impacts to marine wildlife during transit and survey operations.

Table 2 provides information on the seasonal variations in the marine wildlife that are expected to be or have been reported within the Project area.

**Table 2: Abundance Estimates for Marine Mammals and Reptiles of California Unless Otherwise Indicated**

Common Name Scientific Name	Population Estimate	Current Population Trend
<b>REPTILES</b>		
<b>Cryptodira</b>		
Olive Ridley turtle <i>Lepidochelys olivacea</i>	1.39 million (Eastern Tropical Pacific)**	Increasing
Green turtle <i>Chelonia mydas</i>	3,319-3,479** (Eastern Pacific Stock)	Increasing
Loggerhead turtle <i>Caretta caretta</i>	1,000 (California)**	Decreasing
Leatherback turtle <i>Dermochelys coriacea</i>	178 (California)**	Decreasing
<b>MAMMALS</b>		
<b>Mysticeti</b>		
California gray whale <i>Eschrichtius robustus</i>	18,017 (Eastern North Pacific Stock)	Fluctuating annually
Fin whale <i>Balaenoptera physalus</i>	2,624 (California/Oregon/Washington Stock)	Increasing off California
Humpback whale <i>Megaptera novaeangliae</i>	1,878 (California/Oregon/Washington Stock)	Increasing
Blue whale <i>Balaenoptera musculus</i>	2,046 (Eastern North Pacific Stock)	Unable to determine
Minke whale <i>Balaenoptera acutorostrata</i>	202 (California/Oregon/Washington Stock)	No long-term trends suggested
Northern right whale <i>Eubalaena japonica</i>	17 (based on photo-identification) (Eastern North Pacific Stock)	No long-term trends suggested
Sei whale <i>Balaenoptera borealis</i>	83 (Eastern North Pacific Stock)	No long-term trends suggested
<b>Odontoceti</b>		
Short-beaked common dolphin <i>Delphinus delphis</i>	343,990 (California/Oregon/Washington Stock)	Unable to determine
Long-beaked common dolphin <i>Delphinus capensis</i>	17,127 (California Stock)	Unable to determine
Dall's porpoise <i>Phocoenoides dalli</i>	32,106 (California/Oregon/Washington Stock)	Unable to determine
Harbor porpoise <i>Phocoena phocoena</i>	1,478 (Morro Bay Stock)	Increasing
Pacific white-sided dolphin <i>Lagenorhynchus obliquidens</i>	21,406 (California/Oregon/Washington Stock)	No long-term trends suggested
Risso's dolphin <i>Grampus griseus</i>	4,913 (California/Oregon/Washington Stock)	No long-term trends suggested
Short-finned pilot whale <i>Globicephala macrorhynchus</i>	465 (California/Oregon/Washington Stock)	No long-term trends suggested
Bottlenose dolphin <i>Tursiops truncatus</i>	684 (California/Oregon/Washington Offshore Stock)	No long-term trends suggested
	290 (California Coastal Stock)	No long-term trends suggested
Northern right whale dolphin <i>Liissopelphis borealis</i>	6,019 (California/Oregon/Washington Stock)	No long-term trends suggested
Sperm whale <i>Physeter macrocephalus</i>	751 (California/Oregon/Washington Stock)	No long-term trends suggested
Killer whale <i>Orcinus orca</i>	85 (Eastern North Pacific Southern Resident Stock)	Decreasing
	162 (Eastern North Pacific Offshore Stock)	No long-term trends suggested
<b>Pinnipedia</b>		
California sea lion <i>Zalophus californianus</i>	141,842 (U.S. Stock)	Unable to determine; increasing in most recent three year period

US Geological Survey - Pacific Coastal and Marine Geology Science Center  
Marine Wildlife Mitigation Plan – Santa Barbara Survey

Northern fur seal <i>Callorhinus ursinus</i>	5,395 (San Miguel Island Stock)	Increasing
Guadalupe fur seal <i>Arctocephalus townsendi</i>	3,028 (Mexico Stock) Undetermined in California	Increasing
Northern (Steller) sea lion <i>Eumetopias jubatus</i>	2,479 California Stock	Decreasing
Northern elephant seal <i>Mirounga angustirostris</i>	74,913	Increasing
Pacific harbor seal <i>Phoca vitulina richardsi</i>	31,600	Stable
Fissipedia		
Southern sea otter <i>Enhydra lutris nereis</i>	2,711*	Unable to determine

Estimates provided by National Marine Fisheries Service (NOAA Fisheries 2011) \*

Estimate provided by USGS (2010)

\*\* Estimates provided by National Marine Fisheries Service (NMFS) (2004), Marquez, et al. (2002), Eguchi et al. (2007), Benson et al. (2007), and NMFS (2007). Estimates are based on number of current numbers of nesting females.

During the transit periods, there is a potential for encountering marine wildlife. Table 3 lists those species that are likely to occur in the survey area

**Table 3. Marine Wildlife Species and Most Likely Periods of Occurrence within the Survey Area**

Family Common Name	Month of Occurrence <sup>&lt;1)</sup>											
	J	F	M	A	M	J	J	A	S	O	N	D
<b>REPTILES</b>												
<b>Cyptodira</b>												
Olive Ridley turtle (T) <sup>(2)</sup>												
Green turtle (T) <sup>(1),(2)</sup>												
Loggerhead turtle (T) <sup>(2)</sup>												
Leatherback turtle (E) <sup>(2)</sup>												
<b>MAMMALS</b>												
<b>Mysticeti</b>												
California gray whale												
Blue whale (E)												
Fin whale (E)												
Humpback whale (E)												
Minke whale												
Sei whale (E)												
Northern right whale (E)												
<b>Odontoceti</b>												
Short-beaked common dolphin												
Dall's porpoise												
Harbor porpoise												
Long-beaked common dolphin												
Pacific white-sided dolphin												
Risso's dolphin												
Sperm whale												
Short-finned pilot whale												
Bottlenose dolphin												
Northern right whale dolphin												
Killer whale												
<b>Pinnipedia</b>												
Northern fur seal <sup>(3)</sup>												
California sea lion												
Northern elephant seal <sup>(4)</sup>												
Pacific harbor seal												
Guadalupe fur seal (T)												
Steller sea lion												
<b>Fissipedia</b>												
Southern sea otter (T) <sup>(5)</sup>												
Relatively uniform distribution		Not expected to occur						Most likely to occur due to seasonal distribution				

(E) Federally listed endangered species.

(T) Federally listed threatened species.

(1) Not Used

(2) Rarely encountered, but may be present year-round. Greatest abundance during July through September.

(3) Only a small percent occur over continental shelf (except near San Miguel rookery, May-November).

(4) Common near land during winter breeding season and spring molting season.

(5) Only nearshore (diving limit 100 feet).

Sources: Bonnell and Dailey (1993), NOAA Fisheries (2011), NCCOS (2007)

## **4.0 ONBOARD MITIGATIONS**

### **4.1 Fishing Gear Clearance**

In addition to submitting the required Notice to Mariners that will advise commercial fishers of pending on-water activities, prior to the start of each survey day the vessel will traverse the proposed survey corridor for that day to note and record the presence of deployed fishing gear. No survey lines within 30 m (100 ft) of the observed fishing gear will be completed. The survey crew will not remove or relocate any fishing gear; removal or relocation will only be accomplished by the owner or by an authorized CDFG agent.

### **4.2 Marine Wildlife Monitoring**

NOAA does not require exclusion/safety zones to be monitored. Additionally, only one Marine Wildlife Observer (MWO) observer is required for surveys when the only geophysical equipment being used is operated above 200 kHz (above the known functional hearing range of marine mammals). However, the vessel captain, who is a certified Marine Wildlife Observer, or a member of the crew will provide a summary report about marine mammal sightings/encounters (species, number, time, lat/long, behavior, activity of survey vessel, etc.). Our observations are automated; when there is a sighting, the systems operator (attending electronics engineer) makes an observation entry by hitting a function key on the navigation computer and fills in the observation data in the text field. This text file contains the species, number, time, behavior, ships position and vessel activity and is used to generate a GIS map of observations by event number for the post survey report.

### **4.3 Mitigations During Transit and Survey**

The research vessel will transit during day-light hours from Santa Barbara harbor. During transits there is a potential for encountering marine wildlife. Onboard monitoring will be conducted by the vessel master, a certified MWO, and science crew. During transits the vessel will maintain a minimum distance of 100 m (1,640 ft.) from observed animals. If the vessel master observes a marine mammal within the path of the transiting vessel, they will immediately slow the vessel and/or change course in order to avoid contact.

Cetaceans (whales) vary in their swimming patterns and duration of dives and therefore all shipboard personnel will be watchful as the vessel crosses the path of a whale or anytime whales are observed in the area.

If whales are observed during transits, the vessel master will institute the following measures:

- Maintain a minimum distance of 100 m from sighted whales;
- Do not cross directly in front of or across the path of sighted whales;
- When transit directions is parallel to whale path, maintain constant speed that is not

greater than the whales speed, or alter transit direction away from whale path;

- Do not position the vessel in such a manner to separate female whales from their calves;
- If a whale engages in evasive or defensive action, slow the vessel and move away from the animal until the animal calms or moves out of the area.

During survey operations, the vessel will maintain survey a speed of 5-8 knots and will maintain a heading that coincides with survey track lines. If marine wildlife is observed within the vicinity of the vessel, the vessel master will take precautions to avoid collision, ending and restarting the track line survey if necessary.

If a collision with marine wildlife occurs, the vessel master will document the conditions under which the accident occurred, including the following:

- Location of the vessel when the collision occurred (latitude and longitude);
- Date and time;
- Speed and heading of the vessel;
- Observed conditions (e.g., wind speed and direction, swell height, visibility in miles or kilometers, and presence of rain or fog);
- Species of marine wildlife contacted; and
- Organization, vessel ID and name of master in charge of the vessel at time of accident.

In accordance with NOAA requirements, after a collision, the vessel should stop, if safe to do so. The vessel may proceed after confirming that it will not further damage the animal by doing so. The vessel will then communicate by radio or telephone all details to the vessel's base of operations. The PCMG Marine Operations Superintendent will contact the Stranding Coordinator, NMFS, Southwest Region, Long Beach, to obtain instructions. Alternatively, the vessel captain may contact the NMFS Stranding Coordinator directly using the marine operator to place the call or directly from an onboard telephone, if available to:

**NOAA Southwest Regional Stranding  
Coordinator  
National Marine Fisheries Service  
501 West Ocean Blvd, Suite 4200  
Long Beach, CA 90802-4213  
562-980-4017  
Contact: Sarah Wilkin  
Email: [sarah.wilkin@noaa.gov](mailto:sarah.wilkin@noaa.gov)**

It is unlikely that the vessel will be asked to stand by until NOAA or CDFG personnel arrive, however this will be determined by the Stranding Coordinator. According to the MMPA, the vessel operator is not allowed to aid injured marine wildlife or recover the carcass unless requested to do so by the NOAA Stranding Coordinator.



Although NOAA has primary responsibility for marine mammals in both state and federal waters, the CDFG will also be advised that an incident has occurred in state waters affecting a protected species. Reports should be communicated to the federal and state agencies listed below:

<b>Federal</b> Sarah Wilkin, Stranding Coordinator Southwest Region National Marine Fisheries Service Long Beach, California (562)980-4017	<b>State</b> Enforcement Dispatch Desk California Department of Fish and Game Long Beach, California (562)590-5132	<b>State</b> California State Lands Commission Division of Environmental Planning and Management Sacramento, California (916) 574-1938
--	---	---

#### 4.4 Operational Measures

Operational measures to reduce impacts to marine mammals or turtles will include: 1) soft-start technique, 2) marine wildlife monitoring, 3) slow vessel speeds, 4) avoidance of pinniped haul out sites, and 4) limitations on equipment usage.

##### *a) Soft Start*

The soft-start technique will involve initiating the echo sounder at the lowest practical sound level, increasing the output in such a manner as to increase in steps not exceeding approximately 6 decibels per 5-minute period.

##### *b) Wildlife Monitoring*

Marine wildlife monitoring will be conducted by onboard personnel. Due to the small size of the vessel, there is limited space for observers. Several of our technicians and both captains are PSO certified to ensure adequate observations. The designated observer for this survey will be Peter Dartnell and the captains will assist with sighting and identifying marine wildlife.

Because the survey echo sounder operated above 200 kHz, no safety zone is required. The nearest pinniped haul out site in this area is located approximately 1.5 miles from the survey boundary. However, USGS will take the following precautionary measures:

- Not approach within 100 m of the haul-out site (consistent with NMFS guidelines);
- Expedite survey activity in this area in order to minimize the potential for disturbance of pinnipeds on land;
- Pinniped haul out site location is given in Table 4.

- The vessel will continuously monitor the daily survey area to ascertain the presence, species and location of any marine wildlife is apparent in the intended survey area. The vessel master and onboard personnel will be watchful whales or marine mammals are observed in the area. The vessel operator shall observe the following guidelines:
- Make every effort to maintain distance from sighted marine mammals and other marine wildlife;
- Do not cross directly in front of (perpendicular to) migrating whales or any other marine mammal or turtle;
- When paralleling marine mammals or turtles, the vessel will operate at a constant speed that is not faster than that of the animals;
- Care will be taken to ensure female whales are not separated from their calves; and, if a whale engages in evasive or defensive action, the vessel will reduce speed or stop until the animal calms or moves out of the area.

*c) Vessel Speed*

Survey speeds for the SWATHplus sonar data acquisition will be approximately 4 to 7 knots for maximum data accuracy and data quality.

*d) Limitations on equipment usage*

Limitations on the frequency, pulse length, and pulse rate will be implemented to reduce potential harmful noises. The shortest possible pulse length and lowest pulse rate (pings per second) will be used, dependent on water depth.

**Table 4 Pinniped Haul Out Locations**

LOCATION	SPECIES	LATITUDE	LONGITUDE
Carpenteria Bluffs, Carpenteria, CA	Harbor Seal	34.39	-119.51

## 4.5 Monitoring Reporting

A Post Survey Field Operations and Compliance Report will be submitted to CSLC staff as soon as possible but no more than 30 days after the completion of survey activities.

## APPENDIX A: MARINE WILDLIFE OBSERVER CERTIFICATIONS

Since 2006, the USGS Pacific Coastal and Marine Science Center (PCMSC) has provided trained marine mammal observers in support of low power geophysical surveys in California State Waters and Federal Waters under NOAA National Marine Fisheries (NMFS) jurisdictions. These surveys have been conducted under permit authorizations from California State Lands Commission (CSLC) (Permit# PRC 8394) and various NMFS Incidental Harassment Authorizations (IHAs) and Letters of Concurrence. PCMSC has provided training for 17 of their staff research scientists and science and technical support staff as marine wildlife observers (MWO) to support our science programs geophysical surveys and meet our marine mammal mitigation obligations under pursuant to our CSLC and NMFS permit requirements.

The MWO training for our science and technical support staff is provided by Dr. James Harvey, a Professor of Marine Science at MLML and the Interim Director of MLML, and has taught courses on the biology and ecology of marine turtles, birds, and mammals for 22 years. Jim has advised more than 70 graduate students as they obtained their M.S. degree, and has all of the instructional material (handouts, identification manuals, slides, video, etc.) for teaching this workshop.

The training was conducted during a 2 day workshop at Moss Landing Marine Laboratories on the identification of marine mammal species, including handouts, slides, and video. All species of marine mammals in the area of planned USGS activities were discussed, their status and trends, and identifying features that allow species identification, and possibly differentiation between sexes and age classes. The workshop participants were instructed in the “normal” behaviors of marine mammals using visual explanations, slides, and video. A typical data sheet will be prepared and participants instructed how they would complete the data form. The rationale for the need for trained observers and importance of the data was emphasized. This training concluded with an observational cruise aboard an MLML vessel on Monterey Bay to observe the marine mammals discussed in the course in their natural setting and receive identification tips and other information in a field setting similar to that which they would expect during science operations.

### PCMG Certified Marine Mammal Observers

<u>Observer Name</u>	<u>Staff Position</u>
Alicia Balliser-Gee	Science Support
Ginger Barth	Research Scientist
Jayne Bormann	Science Support
Daniel Brothers	Research Scientist
Katherine Coble	Research Scientist
Guy Cochrane	Research Scientist
Jamie Conrad	Research Scientist
Peter Dartnell	Science Support
Dan Powers	Science Support - Vessel Master
Theresa Fregoso	Science Support

*US Geological Survey - Pacific Coastal and Marine Geology Science Center  
Marine Wildlife Mitigation Plan – Santa Barbara Survey*

<u>Observer Name</u>	<u>Staff Position</u>
Steven Hartwell	Science Support
Patrick Hart	Research Scientist
Sam Johnson	Research Scientist
Simon Klemperer	Research Scientist
Sean Paul LaSelle	Science Support
Tom Lorenson	Science Support
Brent Lunghino	Science Support
Tom Parsons	Research Scientist
Carol Reiss	Science Support
Ray Sliter	Science Support
Mike Torresan	Science Support
Peter Triezenberg	Science Support
Steve Watt	Research Scientist
Janet Watt	Research Scientist
Jenny White	Science Support - Vessel Master
Jeff Beeson	Science Support

**U.S. GEOLOGICAL SURVEY  
PACIFIC COASTAL AND MARINE GEOLOGY SCIENCE CENTER**

**MANAGEMENT OF ACCIDENTAL DISCHARGE AND VESSEL INCIDENTS  
DURING OFFSHORE GEOPHYSICAL SURVEYS**

**1.0 INTRODUCTION**

The survey operations will be conducted aboard the USGS Research Vessel Parke Snively, a 36 foot aluminum catamaran powered by twin Volvo Penta diesel engines. Because of the vessel's relatively small size, it is anticipated that response to any operational spills will be quickly identified and response will be initiated quickly and efficiently by the vessel master and on board designated vessel crew. At the initiation of each project or project phase, a spill management review will be conducted by the vessel master who is in all cases the responsible authority. Oil spills in United States (U.S.) marine waters shall be reported immediately.

**2.0 OPERATIONAL SPILLS**

Operational spills might involve one or more of the following substances carried on board the vessel: (i) fuel; (ii) lube oil; (iii) hydraulic oil; or (iv) waste oil. The vessel is equipped with a Buffalo Quick-Response Oil Spill Kit, which includes socks for fast spill containment (three 4" socks), woven polypropylene sheets (15 sheets) for rapid absorption of surface oil and protective gear, protective gloves (1 pair), disposal bag (1), and a set of instructions. This oil spill kit is located in the forward cabin of the vessel. This spill kit is rated to clean up 5 gallons of liquid. All of the liquids (listed below) that could cause a hazardous spill are either in the fuel tank or are located in the aft deck engine maintenance compartment of the vessel. Thus, if a spill occurred, these would be contained in the engine or maintenance compartments or, or if a grounding or instance occurred that punctured the gas tank, this would leak into the water, which is beyond the scope of our cleanup efforts. In the event a spill occurred in the engine compartment, the oil spill kit would be used to contain the hazardous liquids and the bilge would not be emptied until it could be pumped out at a hazardous waste facility. We do not anticipate a spill of greater than 5 gallons.

**(i) Fuel:**

A spill kit shall be available for use in the event of a spill. If the fuel is spilled on the deck, it shall be immediately removed, bagged and disposed of at an appropriate hazardous waste reception facility. In the event of spillage in the water, the vessel master shall notify the Coast Guard and port facility.

**(ii) Lube oil:**

A spill kit shall be available for use in the event of a spill. If the oil is spilled on deck or in the machinery space, it shall be immediately removed, bagged and disposed of at an appropriate hazardous waste reception facility. In the event of spillage in the water, the vessel master shall notify the Coast Guard and port facility.

**(iii) Hydraulic oil:**

A spill kit shall be available for use in the event of a spill. If the oil is spilled on deck or in the machinery space, it shall be immediately removed, bagged and disposed of at an appropriate hazardous waste reception facility. In the event of spillage in the water, the vessel master shall notify the Coast Guard and port facility.

(iv) Pipe leakage:

The vessel master shall check the piping and rubber hose daily for leakage. Where leakage is found, it shall be repaired immediately, in the event of leakage, the vessel deck engineer shall secure valve(s) at the appropriate tank before repairing the leak. Spilled fuel on the vessel shall be immediately removed, bagged and disposed of at an appropriate hazardous waste reception facility. In the event of spillage in the water, the vessel master shall notify the Coast Guard and port facility.

### **3.0 EMPLOYEE TRAINING ON OIL SPILL CONTINGENCY PLAN**

Prior to the launching of the vessel for any activities, all captain and crew members on the vessel will have read the Oil Spill Contingency Plan, understand procedures to be implemented in the event of an oil spill, and know where the oil spill kit is located on the vessel.

### **4.0 VESSEL FUELING**

All vessel fueling will be conducted at an approved docking facility. No cross vessel fueling will be performed. Appropriate spill avoidance measures during filling procedures will be observed.

### **5.0 PRIORITY ACTIONS TO ENSURE PERSONNEL AND VESSEL SAFETY**

Safety of vessel personnel and the vessel are paramount. In the event that a crewman's injuries require outside emergency assistance, the PCMSC safety officer shall be contacted immediately and emergency personnel contacted. While awaiting emergency assistance, the on board vessel master or qualified vessel crew personnel will render first aid and/or CPR. The nearest emergency medical facilities for this area is:

Santa Barbara College Hospital  
400 W Pueblo St, Santa Barbara, CA 93105  
(805) 682-7111

### **6.0 MITIGATING ACTIVITIES**

If safety of both the vessel and the personnel has been addressed, the vessel master shall care for the following issues:

- Assessment of the situation and monitoring of all activities as documented evidence.
- Care for further protection of the personnel, use of protective gear, assessment of further risk to health and safety.

- Containment of the spilled material by absorption and safe disposal within leak proof containers of all used material onboard until proper delivery ashore, with due consideration to possible fire risk.
- Decontamination of personnel after finishing the cleanup process.

All personnel shall refer to the MSDS's on board for additional information.

## **7.0 EMERGENCY CONTACTS FOR STATE AND FEDERAL AGENCIES**

Emergency numbers for U.S.C.G. for the San Francisco and Central Coast Areas are:

Pacific SAR Coordinator - Alameda: 510-437-3700

Rescue Coordination Center, Alameda: 510-437-3700

Any oil spill in U.S. marine waters shall be reported immediately to the following state and agencies:

West Coast Oil Spill hot-line	800-OELS-911, <i>or</i>
Department of Fish and Game CalTIP	888-CFG-CALTip
(Californians Turn In Poachers & Polluters)	(888-334-2258). <i>and</i>
U.S. Coast Guard National Response Center	800-424-8802
California Office of Emergency Services (OES)	800-OILS-911 or 800-852-7550.

During the phone call, the following information will be given over the phone.

- a. Name and telephone number of caller.
- b. Spill location
- c. What was spilled (oil, gas, diesel, etc.)
- d. Estimated size of spill
- e. The date & time spill was identified (same day).
- f. Any oiled or threatened wildlife
- g. Source of spill, if known
- h. Activity observed at the spill site

After taking the necessary actions, the spill will be reported in writing to the Governor's Office of Emergency Services on their forms.

Additionally, California Department of Fish and Game certified wildlife rescue/response organizations will be contacted about the spill. In the Southern California area, these include the following contacts:

Oiled Wildlife Care Network	Animal Advocates
1-877-UCD-OWCN	323-651-1336
California Wildlife Center	South Bay Wildlife Rehab
310-458-9453	310-378-9921







Elfers, Timothy &lt;telfers@usgs.gov&gt;

---

## PRE SURVEY NOTIFICATION FOR GEOPHYSICAL SURVEY - Geophysical Coordinator

---

Elfers, Timothy &lt;telfers@usgs.gov&gt;

Thu, Feb 1, 2018 at 12:04 PM

Draft To: slc.ogpp@slc.ca.gov, D11LNM@uscg.mil, "Keen, Kelly@SLC" &lt;Kelly.Keen@slc.ca.gov&gt; ,

Richard.Greenwood@slc.ca.gov

Cc: "Joanne C. Ferreira" &lt;jferreira@usgs.gov&gt; , Jennifer White &lt;jmckee@usgs.gov&gt;

### PRE SURVEY NOTIFICATION FOR GEOPHYSICAL SURVEY

The USGS Pacific Coastal and Marine Science Center (PCMSC) will be conducting one five-day near shore geophysical survey from Santa Barbara to Carpinteria, CA under California State Lands Permit #8394. Operations will include a high resolution swath bathymetric survey using a pole mounted SEA SwathPlus echo sounder on the USGS research vessel Parke Snavelly, a 36-foot aluminum catamaran. The survey will be conducted from February 26 – March 2, 2018.

In keeping with our California State Lands Permit requirements, we are providing you with the attached Geophysical Pre-Survey Notice for your information.

--

Tim Elfers

Acting Marine Operations Manager  
U.S. Geological Survey  
Pacific Coastal Marine Science Center

Marine Facility  
2831 Mission St  
Santa Cruz, CA 95060

831-460-7479 office  
831-332-9665 cell  
831-421-9209 fax



---

**CSLC EXHIBIT F -Santa Barbara 2018.docx**

781K



Elfers, Timothy &lt;telfers@usgs.gov&gt;

---

## PRE SURVEY NOTIFICATION FOR GEOPHYSICAL SURVEY - Harbor Masters

---

Elfers, Timothy &lt;telfers@usgs.gov&gt;

Thu, Feb 1, 2018 at 12:02 PM

Draft To: CIHarborVisitors@ventura.org, jhiggins@venturaharbor.com, mkronman@santabarbaraca.gov, ktreiberg@santabarbaraca.gov, smarble@ocsd.org, harbormaster@portofhueneme.org

### PRE SURVEY NOTIFICATION FOR GEOPHYSICAL SURVEY

The USGS Pacific Coastal and Marine Science Center (PCMSC) will be conducting one five-day near shore geophysical survey from Santa Barbara to Carpinteria, CA under California State Lands Permit #8394. Operations will include a high resolution swath bathymetric survey using a pole mounted SEA SwathPlus echo sounder on the USGS research vessel Parke Snavelly, a 36-foot aluminum catamaran. The survey will be conducted from February 26 – March 2, 2018.

In keeping with our California State Lands Permit requirements, we are providing you with the attached Geophysical Pre-Survey Notice for your information.

--

Tim Elfers

Acting Marine Operations Manager  
U.S. Geological Survey  
Pacific Coastal Marine Science Center

Marine Facility  
2831 Mission St  
Santa Cruz, CA 95060

831-460-7479 office  
**831-332-9665 cell**  
831-421-9209 fax



---

**CSLC EXHIBIT F -Santa Barbara 2018.docx**  
781K



Elfers, Timothy &lt;telfers@usgs.gov&gt;

---

## PRE SURVEY NOTIFICATION FOR GEOPHYSICAL SURVEY - Dive Shops

---

Elfers, Timothy &lt;telfers@usgs.gov&gt;

Thu, Feb 1, 2018 at 11:45 AM

Draft To: cmcdiver@aol.com, info@santabarbarascuba.com, jeff@pacificwilderness.com, dive@scubadivela.com, sealandingdivecenter@msn.com, blueh2o@west.net

Cc: "Keen, Kelly@SLC" &lt;Kelly.Keen@slc.ca.gov&gt;, richard.greenwood@slc.ca.gov, "Joanne C. Ferreira" &lt;jferreira@usgs.gov&gt;, Jennifer White &lt;jmckee@usgs.gov&gt;

### PRE SURVEY NOTIFICATION FOR GEOPHYSICAL SURVEY

The USGS Pacific Coastal and Marine Science Center (PCMSC) will be conducting one, five-day near shore geophysical survey from Santa Barbara to Carpinteria, CA under California State Lands Permit #8394. Operations will include a high resolution swath bathymetric survey using a pole mounted SEA SwathPlus echo sounder on the USGS research vessel Parke Snively, a 36-foot aluminum catamaran. The survey will be conducted from February 26 – March 2, 2018.

In keeping with our California State Lands Permit requirements, we are providing you with the attached Geophysical Pre-Survey Notice for your information.

--

Tim Elfers

Acting Marine Operations Manager  
U.S. Geological Survey  
Pacific Coastal Marine Science Center

Marine Facility  
2831 Mission St  
Santa Cruz, CA 95060

831-460-7479 office  
831-332-9665 cell  
831-421-9209 fax



---

**CSLC EXHIBIT F -Santa Barbara 2018.docx**  
781K